



1. Purpose of the Standard

This standard defines an interface which insures a secure and quick installation or replacement of a decoder or function decoder.

Notes: Detailed information on this interface can be found in RailCommunity standard RCN-121, Edition of December 2024 (www.railcommunity.org).

2. Description of the Interface

This interface is usable for AC-Motors (2 field coils), DC-Motors or bell rotor DC-Motors.

Up to 8 outputs are provided for functions and 4 inputs are provided for sensors, alternatively 12 functional outputs are provided.

The required room for installation of the decoder and its dimension are integral part of this standard.

2.1 Mechanical Characteristics

The interface on the system PCB (printed circuit board) consists of 22 pin male plugs arranged in two rows with 1.27 mm interval. The dimension of the decoder are at most 30 (L) x 15.5 (W(B)) x 6.5 (H) mm. The system PCB must provide sufficient room in order to plug in the decoder without force on the PCB.

Male and female plugs form a bridge consisting of 11 contacts in two rows. Preferred is a soldering of the plugs on the system PCB. Not installing pin 11 and blocking the associated socket insures the correct insertion on the PCB.

2.1.1 Decoder

The decoder is provided with a bridge of female plugs. The plugs are oriented on the low side of the decoder PCB.

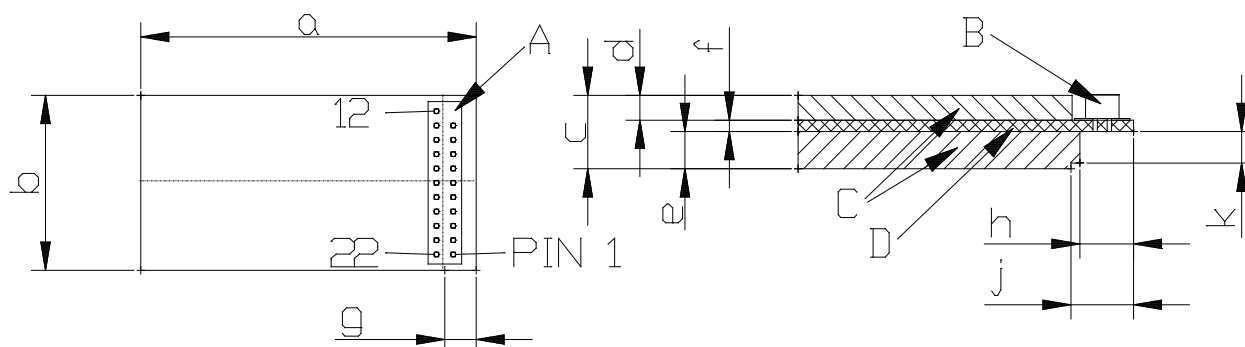


Fig. 1: Decoder with female plugs, plan view and side view for compact plug variant

A = Index position Pin 1

B = Socket

C = Components on the top and bottom

D = Decoder board

The lower-case letters in Table 1 correspond to the following dimensions. Unless otherwise stated, all values are maximum dimensions.

Table 1:

a	Length	30.0
b	Width	15.5
c	Total height	6.5
d	Equipment height above	2.2
e	Assembly height below	3.3
f	Board thickness	1.0
g	Distance between the center of the socket strip and the edge	2.8 exact
h	Area to be kept clear on the underside	4.8
j	Area with reduced equipment height	5.8
k	Reduced assembly height	2.8

The bridge of plugs must be located from the edge of the PCB as shown in Fig. 1. The decoder may be shorter than $L = 30$ mm.

The maximum height of the decoder is given and must be observed. Fig. 2 shows the assembly.

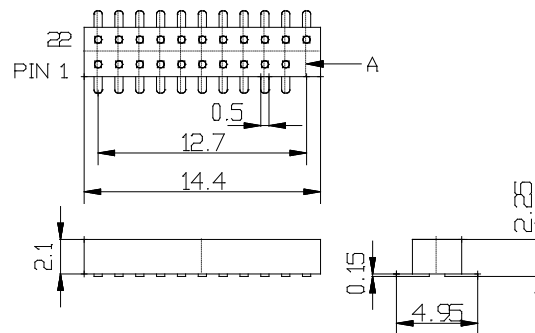


Fig. 2: Typical socket connections for decoders, A = Index position Pin 11

2.1.2. System PCB

The system PCB provides the housing for the decoder according to its maximum dimensions, without using any force to plug in the decoder. Sufficient space should be provided to install or uninstall the decoder without any special tool. A suitable male pin arrangement shows Fig. 3.

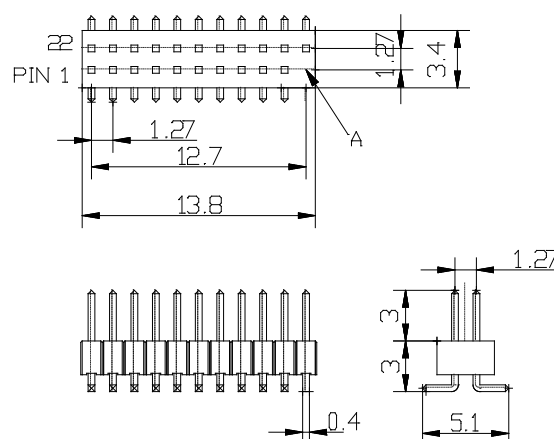


Fig. 3: Typical pin header for vehicles, A = Index position Pin 11

Male and female plugs have common dimensions of this type of connections. The male plugs consist of a length of 3 mm and have either a square profile of 0.40 x 0.40 mm shape or a round profile with 0.43 mm diameter. The surface is gilded and allows a maximum current of 1A.

2.1.3. Decoder-Mounting

It is possible to mount the decoder in two different positions.

2.1.3.1 Compact variant

The compact mounting results in the smallest space requirements. In this case the decoder is plugged in with the female plugs on top. The male pins make contact through the PCB of the decoder. The decoder sits plane on the system PCB.

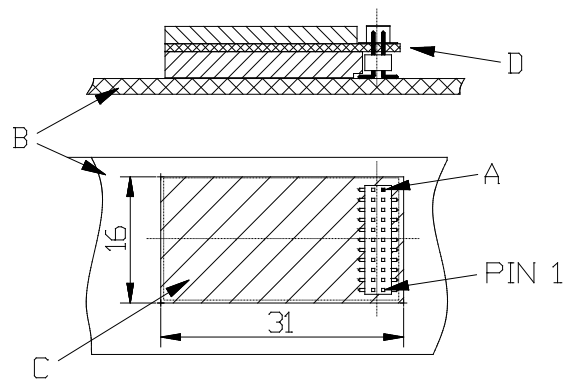


Fig. 4: Compact variant
 A = Index position Pin11
 B = Circuit board in the vehicle
 C = On the board in the vehicle of components area to be kept clear
 D = Decoder board

2.1.3.2 Rotated variant

If there is enough height available, but no free space on the vehicle board, the vehicle manufacturer can use the rotated variant. The decoder is plugged in with the socket facing downwards (towards the vehicle circuit board). The assignment of the connector on the vehicle circuit board must be mirrored in the axis of pin 6 and 17.

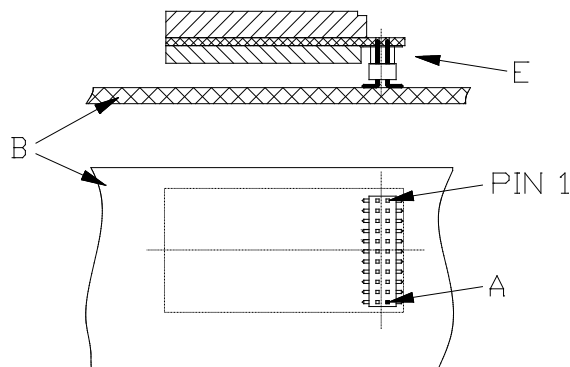


Fig. 5: Rotated variant
 A = Index position Pin 11
 B = circuit board in the vehicle
 E = Pin header

Vehicles with a factory-installed interface to this standard must be clearly marked with the logo 21MTC on the packaging:



2.2 Electrical Characteristics

Manufacturers of this decoder must specify the maximum current allowed to drawn for each output.

Connections that are not used on the vehicle side should be routed to soldering points on the vehicle mainboard.

2.3 Pin Assignments of the interface for using decoders

The pin assignments for 21MTC are defined in Table 2:

Table 2: Pin assignments, description and definition of function

Pin	Name	Description	Group
1	GPIO_A / AUX7	Sensor-Input A, alternate output 7 ¹⁾	4
2	GPIO_B / AUX8	Sensor-input B, alternate output 8 ¹⁾	4
3	AUX6	Output 6 ¹⁾	8
4	AUX4	Output 4 ¹⁾	8
5	ZBCLK / GPIO_C / AUX9	Trains Bus Clock, input or output C, alternate output 9 ¹⁾	7
6	ZBDATA / GPIO_D / AUX10	Train Bus Data, input or output D, alternate output 10 ¹⁾	7
7	F0_r	Head signal in direction rear, amplified output	5
8	F0_f	Head signal in direction forward, amplified output	5
9	LS_A / LS_AUXA	Speaker Connection A, alternate output A	6
10	LS_B / LS_AUXB	Speaker Connection B, alternate output B	6
11	Index	Not used, Orientation	
12	Vcc	Internal Decoder-Voltage 1.8 – 5.7 Volt	2
13	AUX3	Output 3 ¹⁾	8
14	AUX2	Output 2 (amplified output), train rear signal for forward direction of travel, if separated from the head signal	5
15	AUX1	Output 1 (amplified output), train rear signal for reverse direction of travel, if separated from the head signal	5
16	U+	Decoder Plus, referenced at rectifier, port storage capacitor	2
17	AUX5	Output 5 ¹⁾	8
18	Motor- / M_AUXB	Motor-connection minus ²⁾ , alternatively amplified output B for function decoders	3
19	Motor+ / M_AUXA	Motor-connection plus ²⁾ , alternatively amplified output A for function decoders	3
20	GND	Decoder Ground minus, referenced at rectifier	2
21	Power pick-up left	Power pick-up left in direction forward, in analog mode connected with motor-	1
22	Power pick-up right	Power pick-up right in direction forward, in analog mode connected with motor+	1

¹⁾ It should be noted that when the decoder processor is being started, uncontrolled states including a high-resistance state at the outputs with logic level can occur for a short time. Critical hardware on the mainboard must be secured accordingly.

²⁾ The specified polarity refers to the motor connections for direction of travel 1 (forward) as per NEM 631.

Annotations for the Groups:

Group 1: When supplied with AC-Motors Pin 21 is connected to the wheels and Pin 22 to the power pick-up to the center conductor.

Group 2: A voltage U+ generated on the vehicle circuit board must not be connected to pin 16 (U+) of the interface.
If external storage capacitors are connected to U+, the inrush current must be limited on the vehicle main board.
Pin 12 (Vcc) is not mandatory. It is recommended to use this connection only for the access bus interface.

Group 3: Pin 19 is field coil A, Pin 18 is field coil B for AC-Motors.

- Group 4:** Optional inputs or outputs or outputs with logic level. They can also be used as analog inputs. In this case, the static input resistance must be above 100 kΩ. The control from the vehicle must then not supply more than 3.3 V.
For wheel synchronization in steam locomotives should preferably be used GPIO_A.
These pins can also be used as function outputs with logic levels according to group 8.
- Group 5:** These amplified function outputs are used to switch loads by switching the output internally to GND. The voltage for the switched load results from the track voltage at U+.
For function decoders, this also applies to the M_AUXA and M_AUXB outputs and, if not used for loudspeakers, also for LS_AUXA and LS_AUXB. For the latter, the open-circuit voltage must not exceed 3.3 V.
In case the rear signals are connected to the decoder separately, the rear lights of vehicle in forward direction 1 are switched with Pin 15 and those in rear direction 2 with Pin 14.
- Group 6:** The speaker impedance is defined by the decoder manufacturer and is as such documented.
When alternatively used as amplified outputs (e.g. for function decoders), no voltage above 3.3 V may be applied when the output is switched off (idle). Otherwise an accidentally plugged-in sound decoder may be damaged.
- Group 7:** The microcontroller-pins of the train bus are connected through a serial resistor with 470 Ω. The levels correspond to those of the function outputs with logic level.
These pins can also be used as function inputs or outputs with logic levels.
Servos should preferably be controlled via these pins. Serial buses should always use GPIO_C and GPIO_D.
- Group 8:** Outputs are defined as logic-level according to Table 3D, against GND and with maximum load 0.5 mA.
- Groups 4 and 7:**
GPIO_A to GPIO_D may be used as digital inputs, they are switched to GND. The decoder must then have a pull-up in the range 10 to 50 kΩ.

Table 3:	Voltage Level Decoder Output	Voltage Level for switching element on system board
Function switched off	$\leq 0.4 \text{ V}$	$\leq 0.8 \text{ V}$
Function switched on	$\geq 2.4 \text{ V}$	$\geq 2.0 \text{ V}$

3. Operation without Decoder

When operating without a decoder, a female jumper plug must be used, which connects at least the power pick-up of right rail (Pin 22) with Motor1 (Pin 19) and Power pick-up of left rail (Pin 21) with Motor2 (Pin 18).

If head signals exist the appropriate pins on the jumper plug must be bridged.

Depending of the wiring of the function outputs in the vehicle, the vehicle manufacturer can produce a jumper plug specific to the vehicle that connects other outputs

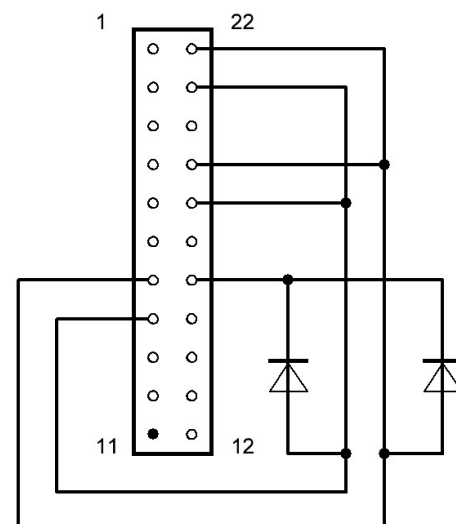


Fig. 6: Typical Jumper plug